

ZMK20R10DAS Series Hall Current Sensor

Hall current sensor uses Hall effect principle to measure DC, AC, pulse and various irregular waveform currents under the condition that the original and secondary sides are completely isolated.



RoHS



Feature

- Hall effect measurement principle
- Meet UL94-V0 standard

Advantage

- Easy to install
- Low power consumption
- Wide measuring range
- High precision and good linearity
- Low temperature drift
- Strong anti-interference ability
- Strong overload capability

Application

- AC frequency conversion speed control device
- DC head cabinet
- UPS uninterruptible power supply
- SMPS Switched Mode Power Supplies
- Electric welder machine
- Power DC screen
- Industrial grade

Performance parameter

Electrical parameters

Rated current rms	I _{pn}	50A	100A	200A	300A	600A
Measuring range	I _{pm}	150A	300A	600A	900A	900A
Rated output @I _p	V _o	4V				
Load Resistance	R _L	>10KΩ				
Supply Voltage	U _c	±12V~±15V				
Current consumption	I _c	≤15mA				
Insulation voltage	V _d	3.5kVAC/50Hz/1min				

Dynamic parameter


Precision (@I _{pn} , Ta=25°C)	X _G	<±1.0%				
Linearity (@Ta=25°C)	E _r	<±1.0%FS				
Zero offset voltage (@Ta=25°C, I _p =0)	V _{OE}	<±25mV				
Magnetic offset voltage(I _{pn} >0)	V _{OH}	<±25mV				
Zero temperature drift	TCV _{OE}	<±1.0mV/°C				
Response time	T _r	<3us				
Accurately followed	di/dt	>100A/us				
Frequency bandwidth (@-3dB)	BW	DC~20kHz				

General parameters


Ambient operating temperature	T _a	-40~+85°C				
Ambient storage temperature	T _s	-55~+125°C				
Weight	m	65g				
Case material		PBT G30/G15 UL94-V0				
Executive standard		EN50178:1998 IEC60950-1:2001 SJ20790-2000				

structure

Unit: mm

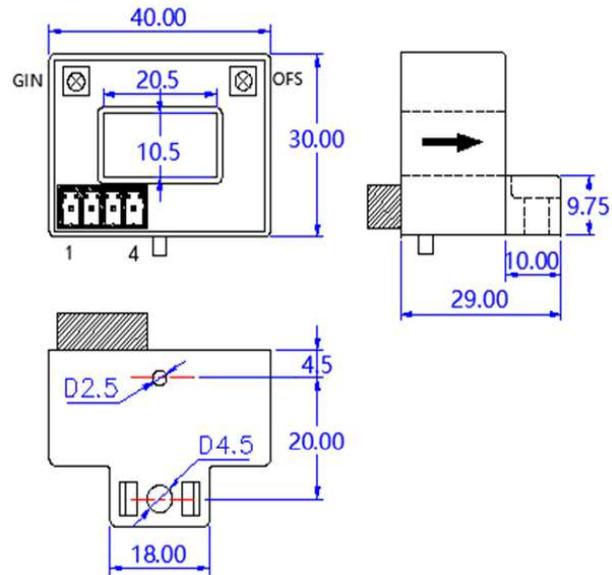

Instructions

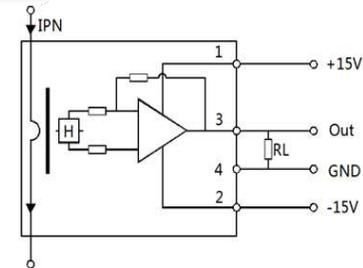

1. The direction of the current should be the same as the direction of the arrow of the casing;
2. Please refer to the wiring definition on the physical shell, the wrong wiring will Damaged module;
3. In order to obtain better dynamic characteristics and sensitivity, it is recommended to use a single turn wire and the wire fills the module through the wire hole best;
4. The primary side wire temperature should not exceed 100 °C;
5. The above parameters are standard specifications, and the products can be customized according to customer needs.